

- Compliant for 100% Lead(Pb)-Free and RoHS.
- 
- 
- 


- 
- 
- 
- 

Dimensions: [mm]

| t tóú bŭ | OCL | <div>LQŠİŰűŁŲŞ<br/>@ 100KHz/1V<br/>●I</div> |      |      |     |     |     |     | Kps<br>Typ. |
|----------|-----|---------------------------------------------|------|------|-----|-----|-----|-----|-------------|
|          |     |                                             | Typ  | Max  | Typ | Max | Typ | Max |             |
|          | 1   |                                             | 0.14 | 0.16 | 68  |     | 88  |     |             |
|          |     |                                             | 0.14 | 0.16 | 68  |     | 88  |     |             |


All test data is referenced to 25 °C ambient.  
Saturation Current will cause L0 to drop approximately 30%.  
Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40$  °C.

Soldering Reflow:

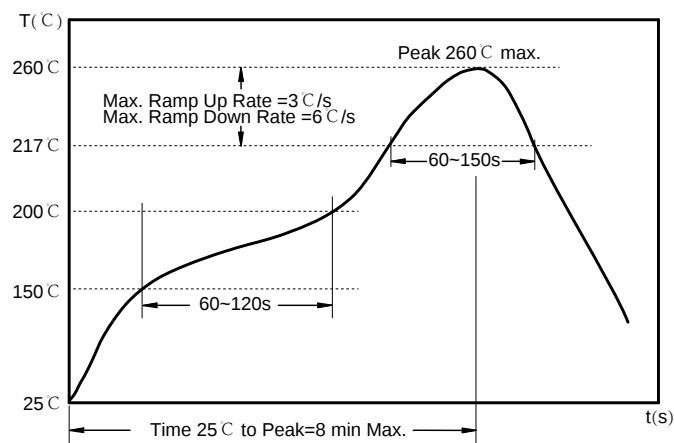

Packaging Information:

Tape Dimension:

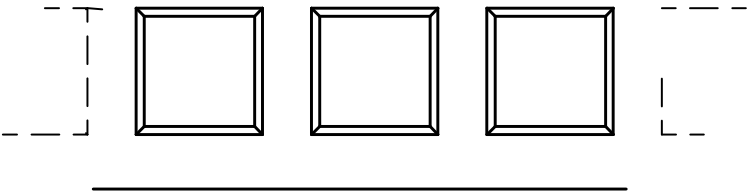

| A0<br>(mm) | B0<br>(mm) | D<br>(mm) | P0<br>(mm) | P1<br>(mm) | W<br>(mm) | K0<br>(mm) | E<br>(mm) | T<br>(mm) |
|------------|------------|-----------|------------|------------|-----------|------------|-----------|-----------|
|            |            |           |            |            |           |            |           |           |

Product Marking:

|         |                       |
|---------|-----------------------|
| Marking | Printing (Inductance) |
|---------|-----------------------|

Reel Dimension: [mm]

Cautions and Warnings:

Storage Conditions :

- 

Operation Instructions: